



HANDLING MANUAL
HPS40-2 2+2 NAFTA with CPA




HIRSCHMANN
AUTOMOTIVE


1 Handling manual - plugging

1.1 Step 1

Move the connector [1] to the mating side [2] and fit the connector.

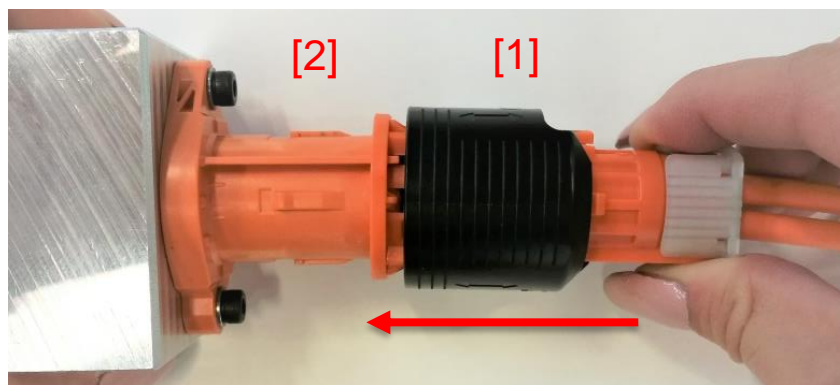


TIPP:

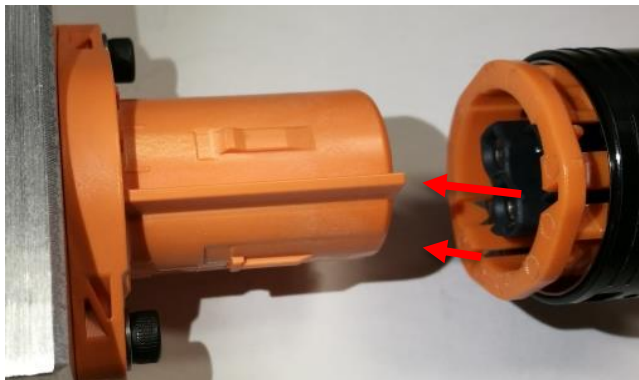

Consider the correct orientation.

1.2 Step 2

Move the connector with force until block.

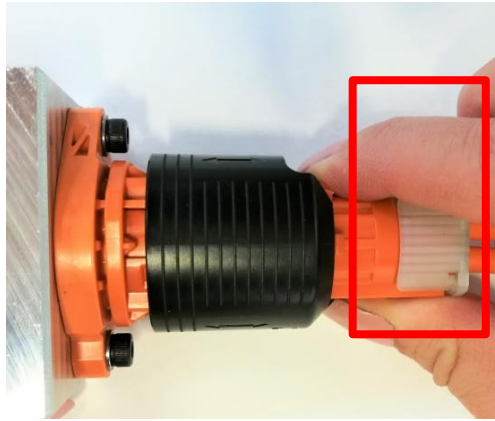

Preferred contact surface.




TIPP:



If the connector is not in the final position – the locking hook stays outside – a movement of the CPA (black part) is not possible.

1.3 Step 3

Move the CPA (black part) to the front block.

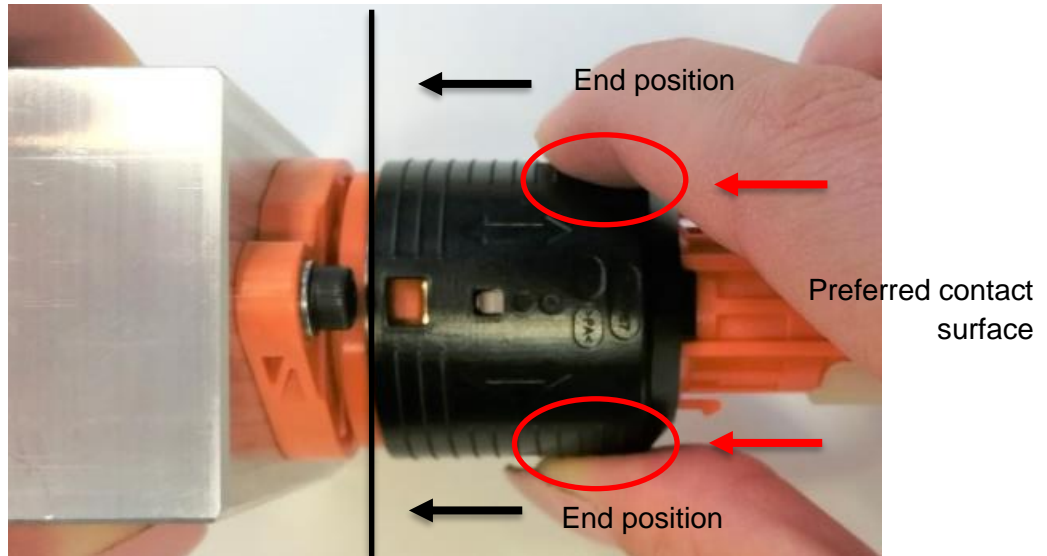

TIPP:



The CPA (black part) is locked, if "locked" is visible.


2 Handling manuel – Disconnect

2.1 Step 1

Pull CPA (black part) back until the blocking position.




TIPP:

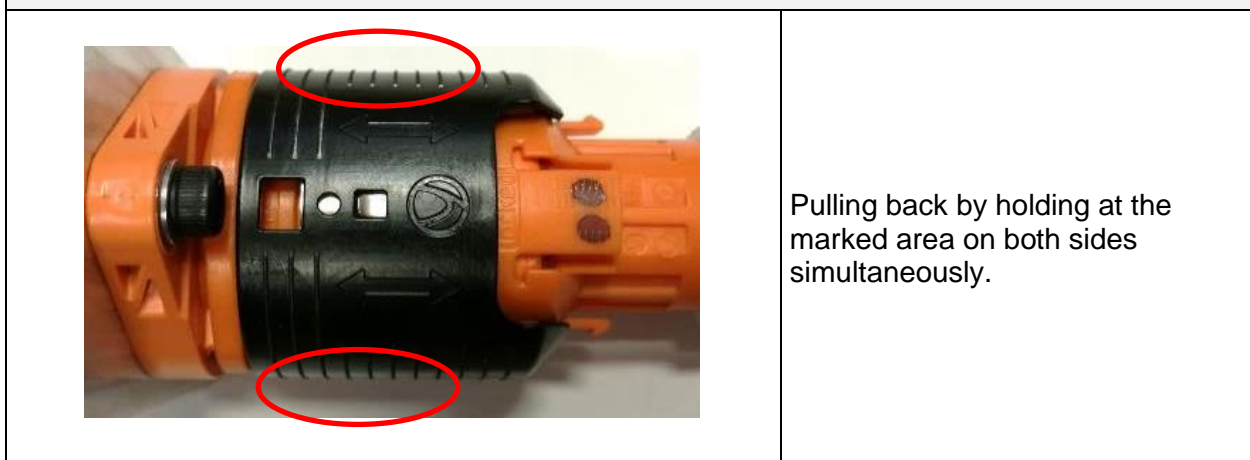



2.2 Step 2

First press the locking hook, hold it, and then pull the connector back.

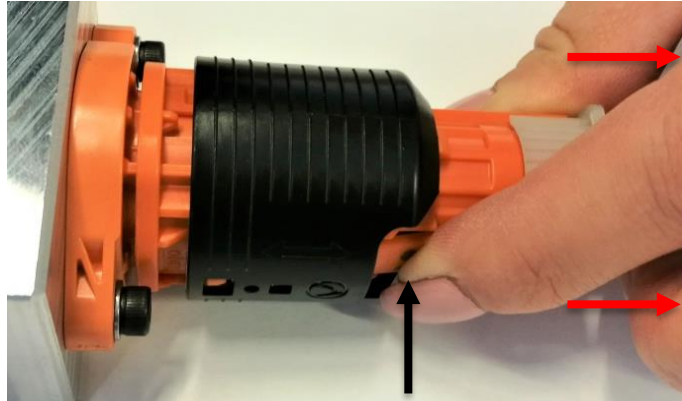

TIPP:



Pressing area of the locking hook.