



HANDLING MANUAL
HPS40-1 2+2 without CPA



HIRSCHMANN
AUTOMOTIVE

1 Handling manual - plugging

1.1 Step 1

Collar the connector [1] to the mating side [2] and insert the connector.



TIPP:



Consider the correct Orientation.




1.2 Step 2

Insert the connector with force until block.



TIPP:

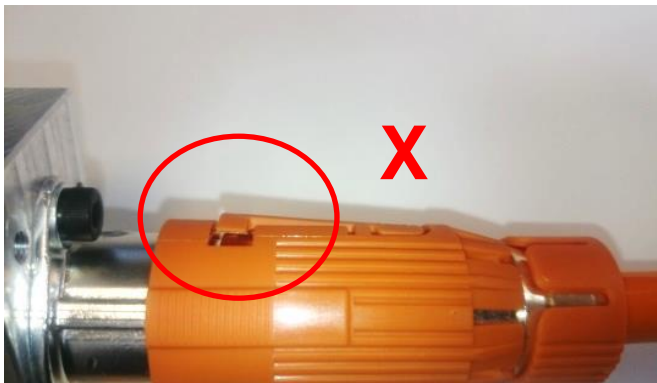


If the connector is not at the final position, the locking hook stays outside.

2 Handling manual - disconnect

2.1 Step 1

First pressing both locking hooks together and then pull the connector.

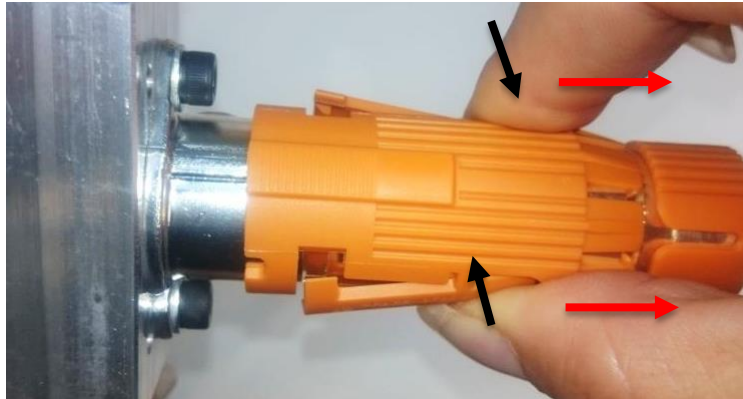

TIPP:



Pressing area of locking-hook on both sides.
If it is easier, it is allowed to support by pulling at the cable.